

Cable Ties

自锁式尼龙扎带

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 操作温度：-35℃ to 85℃。
- 颜色：标准颜色为本色(白色)，另有抗紫外线之黑色，特殊颜色欢迎订做。

Self-locking Nylon Cable Ties

- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Operating temperature: -35℃ to 85℃.
- Color: Natural(or white, standard color),UV black and other colors are available as requested.




Underwriters
Laboratories Inc.
File E 359184

* W=white & natural (白色) B=Black (黑色)
BR=Brown (棕色) RD=Red (红色)
OR=Orange (橘色) YL=Yellow (黄色)
GN=Green (绿色) BL=Blue (蓝色)
PP=Purple (紫色) GY=Gray (灰色)

编号 ITEM.NO.	L(长)		W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力	
	INCH	MM			Min. Loop Tensile Strength LBS	KGS
CHS-3×60	2 3/8"	60	2.5	2-11	18	8
CHS-3×80	3 3/16"	80	2.5	2-16	18	8
CHS-3×90	3 5/8"	90	2.5	2-18	18	8
CHS-3×100	4"	100	2.5	2-22	18	8
CHS-3×120	4 3/4"	120	2.5	2-30	18	8
CHS-3×140	5 1/2"	140	2.5	2-33	18	8
CHS-3×150	6"	150	2.5	2-35	18	8
CHS-3×160	6 1/4"	160	2.5	2-40	18	8
CHS-3×200	8"	200	2.5	3-50	18	8
CHS-4×100	4"	100	3.5	3-22	40	18
CHS-4×120	4 3/4"	120	3.5	3-30	40	18
CHS-4×140	5 1/2"	140	3.5	3-33	40	18
CHS-4×150	6"	150	3.5	3-35	40	18
CHS-4×180	7"	180	3.5	3-42	40	18
CHS-4×200	8"	200	3.5	3-50	40	18
CHS-4×220	8 5/8"	220	3.5	3-58	40	18
CHS-4×250	10"	250	3.5	3-65	40	18
CHS-4×280	11"	280	3.5	3-70	40	18
CHS-4×300	11 5/8"	300	3.5	3-80	40	18
CHS-4×370	14 1/2"	370	3.5	3-102	40	18
CHS-5×120	4 3/4"	120	4.5	3-24	50	22
CHS-5×180	7"	180	4.5	3-42	50	22
CHS-5×190	7 1/2"	190	4.5	3-46	50	22
CHS-5×200	8"	200	4.5	3-50	50	22
CHS-5×250	10"	250	4.5	3-65	50	22
CHS-5×280	11"	280	4.5	3-70	50	22
CHS-5×300	11 8/5"	300	4.5	3-82	50	22
CHS-5×350	13 3/4"	350	4.8	3-90	50	22



Cable Ties

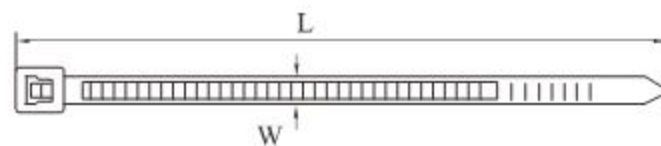


编号 ITEM.NO.	L(长)		W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力 Min. loop Tensile Strength	
	INCH	MM			LBS	KGS
CHS-5×380	15"	380	4.8	3-102	50	22
CHS-5×400	15 3/4"	400	4.8	3-105	50	22
CHS-5×430	17"	430	4.8	3-110	50	22
CHS-5×450	17 3/4"	450	4.8	3-130	50	22
CHS-5×500	19 11/16"	500	4.8	3-150	50	22
CHS-8×150	6"	150	6.8	3-33	85	38
CHS-8×180	7"	180	6.8	3-42	85	38
CHS-8×200	8"	200	6.8	3-50	85	38
CHS-8×250	10"	250	7.5	4-63	120	55
CHS-8×300	11 5/8"	300	7.5	4-82	120	55
CHS-8×350	13 3/4"	350	7.5	4-90	120	55
CHS-8×370	14 1/4"	370	7.5	4-98	120	55
CHS-8×400	15 3/4"	400	7.5	4-105	120	55
CHS-8×450	17 3/4"	450	7.5	4-118	120	55
CHS-8×500	19 11/16"	500	7.5	4-150	120	55
CHS-8×550	21 1/16"	550	7.5	4-160	120	55
CHS-8×600	23 5/8"	600	7.5	4-170	120	55
CHS-8×750	29 9/16"	750	7.5	4-220	120	55
CHS-9×450	17 3/4"	450	9.0	4-118	175	80
CHS-9×530	20 3/4"	530	9.0	8-155	175	80
CHS-9×550	21 1/16"	550	9.0	8-160	175	80
★ NEW CHS-9×600	23 5/8"	600	9.0	8-170	175	80
CHS-9×650	25 9/16"	650	9.0	8-190	175	80
CHS-9×700	27 1/2"	700	9.0	10-205	175	80
CHS-9×760	30"	760	9.0	10-225	175	80
CHS-9×920	36 1/4"	920	9.0	10-265	175	80
CHS-9×1020	40 1/6"	1020	9.0	10-295	175	80
CHS-9×1150	45 1/4"	1150	9.0	10-310	175	80
CHS-9×1220	48"	1210	9.0	10-340	175	80
CHS-9×1350	53"	1350	9.0	10-380	175	80
CHS-10×450	17 3/4"	450	10.0	10-125	200	91
CHS-10×500	19 11/16"	500	10.0	12-150	200	91
CHS-12×300	11 5/8"	300	12.7	12-82	250	114
CHS-12×400	15 3/4"	400	12.7	12-105	250	114
CHS-12×540	21 1/4"	540	12.7	14-155	250	114
CHS-12×650	25 9/16"	650	12.0	14-190	250	114
CHS-12×750	29 9/16"	750	12.0	10-220	250	114
CHS-12×780	30 3/4"	780	12.7	14-230	250	114
CHS-13×540	21 1/4"	540	13.0	14-155	250	114

Cable Ties (other sizes)




编号 ITEM.NO.	L(长)		W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力 Min. loop Tensile Strength	
	INCH	MM			LBS	KGS
CHS-1.8×100	4"	100	1.8	2-22	14	6.5
CHS-1.9×120	4 3/4"	120	1.9	2-30	14	6.5
CHS-1.9×150	6"	150	1.9	2-35	14	6.5
CHS-2.2×60	2 3/8"	60	2.2	2-11	18	8
CHS-2.2×80	3 3/16"	80	2.2	2-18	18	8
CHS-2.2×100	4"	100	2.2	2-22	18	8
CHS-2.2×120	4 3/4"	120	2.2	2-30	18	8
CHS-2.2×150	6"	150	2.2	2-35	18	8
CHS-2.2×200	8"	200	2.2	3-50	18	8
CHS-2.9×150	6"	150	2.9	3-35	33	15
CHS-2.9×200	8"	200	2.9	3-50	33	15
CHS-2.7×250	10"	250	2.7	3-65	33	15
CHS-2.9×300	11 5/8"	300	2.9	3-80	33	15
CHS-3.2×150	6"	150	3.2	3-35	40	18
CHS-3.2×180	7"	180	3.2	3-42	40	18
CHS-3.2×200	8"	200	3.2	3-50	40	18
CHS-3.2×250	10"	250	3.2	3-65	40	18
CHS-3.2×300	11 5/8"	300	3.2	3-80	40	18
CHS-3.7×350	13 3/4"	350	3.7	3-90	40	18
CHS-3.7×400	15 3/4"	400	3.7	3-105	40	18
CHS-4.2×180	7"	180	4.2	3-42	50	22
CHS-4.2×200	8"	200	4.2	3-50	50	22
CHS-4.2×250	10"	250	4.2	3-65	50	22
CHS-4.2×300	11 5/8"	300	4.2	3-80	50	22
CHS-4.2×350	13 3/4"	350	4.2	3-90	50	22
CHS-4.2×380	15"	380	4.2	3-102	50	22
CHS-4.2×400	15 3/4"	400	4.2	3-105	50	22
CHS-5.2×180	7"	180	5.2	3-42	65	30
CHS-5.2×200	8"	200	5.2	3-50	65	30
CHS-5.2×250	10"	250	5.2	3-65	65	30
CHS-5.2×300	11 5/8"	300	5.2	3-80	65	30
CHS-5.5×350	13 3/4"	350	5.5	3-90	65	30
CHS-5.5×400	15 3/4"	400	5.5	3-105	65	30
CHS-5.5×500	19 11/16"	500	5.5	3-150	65	30
CHS-6.0×270	10 5/8"	270	6.0	4-65	65	30
CHS-6.5×250	10"	250	6.5	4-65	85	38
CHS-6.5×300	11 5/8"	300	6.5	4-80	85	38
CHS-6.5×350	13 3/4"	350	6.5	4-90	85	38
CHS-6.5×400	15 3/4"	400	6.5	4-105	85	38
CHS-6.5×450	17 3/4"	450	6.5	4-130	85	38
CHS-6.5×500	19 11/16"	500	6.5	4-150	85	38

Cable Ties

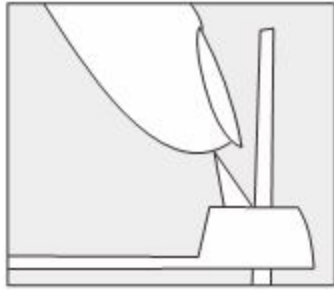

■ CHS-100RRT 外扣型
■ CHS-150RRT

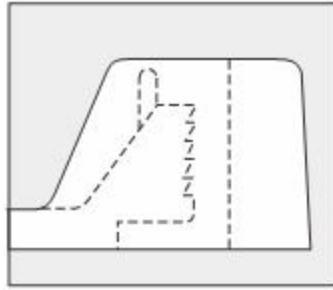

■ CHS-300RRT 内扣型
■ CHS-400RRT
■ CHS-450RRT
■ CHS-550RRT
■ CHS-780RRT



可松式尼龙扎带


- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 特点：可以松开重复使用。

Releasable Cable Ties

- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Usage: releasable


可松式尼龙扎带(活用型) Releasable Cable Ties

编号 ITEM.NO.	L(长) INCH MM		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH LBS KGS	
CHS-150RT	6"	150	7.5	35	50	22
CHS-200RT	8"	200	7.5	45	50	22
CHS-250RT	10"	250	7.5	60	50	22
CHS-300RT	12"	300	7.5	75	50	22
CHS-505RT	19 11/16"	500	8.5	145	75	34

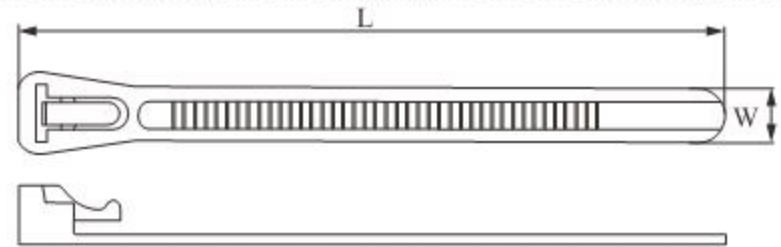

可松式尼龙扎带(反穿型) Releasable Cable Ties

编号 ITEM.NO.	L(长) INCH MM		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH LBS KGS	
CHS-350RT	13 5/8"	350	8.0	90	50	22
CHS-400RT	15 3/4"	400	8.0	105	50	22
CHS-450RT	17 3/4"	450	8.0	118	50	22
CHS-500RT	19 11/16"	500	9.0	150	65	30

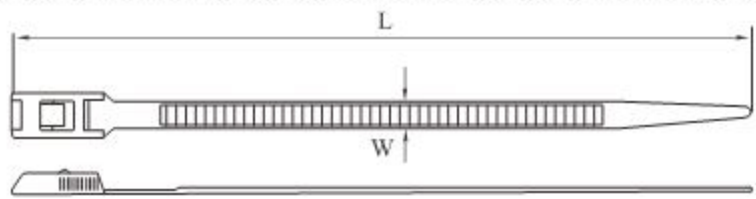

可松式尼龙扎带(外扣型) Releasable Cable Ties

编号 ITEM.NO.	L(长) INCH MM		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH LBS KGS	
CHS-100RRT	4"	100	2.5	22	18	8
CHS-150RRT	6"	150	3.5	35	40	18

可松式尼龙扎带(内扣型) Releasable Cable Ties

编号 ITEM.NO.	L(长) INCH MM		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH LBS KGS	
CHS-300RRT	11 5/8"	300	12.7	82	250	114
CHS-400RRT	15 3/4"	400	12.7	105	250	114
CHS-450RRT	17 3/4"	450	9.0	118	175	80
CHS-550RRT	21 11/16"	550	9.0	160	175	80
CHS-780RRT	30 3/4"	780	12.7	230	250	114

Cable Ties


标牌式尼龙扎带

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 特别：扎带前端设有空白标牌，可用油性笔在上面标志记号。

Marker Nylon Cable Ties

- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Feature: It is easy to mark on the space at front tip of ties with oil pen.


编 号 ITEM.NO.	L(长)		W(宽) (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH		标牌尺寸 STICKER SIZE
	INCH	MM			LBS	KGS	
CHS-100MKT	4"	100	2.5	22	18	8.0	25×8
CHS-110MKT	4 1/3"	110	2.5	22	18	8.0	21×10
CHS-200MKT	8"	200	2.5	22	18	8.0	25×8
CHS-205MKT	8"	205	3.6	22	40	18.0	25×8

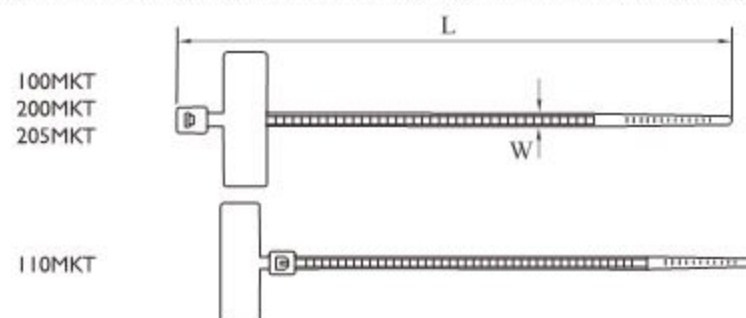

珠形尼龙扎带 Bead Ties

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.


编 号 ITEM.NO.	L(长)		(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH	
	INCH	MM		LBS	KGS
CHS-100BT	4"	100	20	11	5.0



珠孔形尼龙扎带 Knot Ties

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 用途：一般电源线之绑扎，可再松开重复使用。
- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Usage: releasable

编 号 ITEM.NO.	L(长)		(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH	
	INCH	MM		LBS	KGS
CHS-120KT	5 3/4"	120	25	18	8
CHS-150KT	6"	150	35	18	8
CHS-180KT	7"	180	45	18	8



Cable Ties


双扣式尼龙扎带

- 材质：采用UL认可尼龙12或尼龙66料制成，防火等级94V-2，耐酸蚀，不易老化。
- 特点：双锁式设计、承受力特强。

Double Locking Cable Ties

- Material: Nylon 12 or Nylon 66 certificated by UL.
- Usage: double locking, strong supporting capacity.

编 号 ITEM.NO.	L(长)		W(宽) (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH	
	INCH	MM			PA12 (KGS)	PA66 (KGS)
CHS-115DL	5 1/8"	115	6.0	22	18	35
CHS-180DL	7"	180	6.0	45	18	35
CHS-180DDL	7"	180	9.0	45	25	40
CHS-260DL	10 1/4"	260	9.0	66	40	50
CHS-350DL	13 5/8"	350	9.0	90	40	50

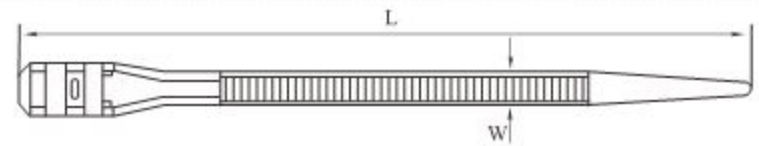


固定头式尼龙扎带

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 特点：扎带捆孔电线后，将整束电线用螺钉固定于基板上。

Mountable Head Ties


- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Usage: after bundling wires, fix them on plate with screw.

编 号 ITEM.NO.	L(长)		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
CHS-110MT	4 1/3"	100	3.5	22	18	8.0
CHS-150MT	6"	145	3.6	32	30	13.6
CHS-200MT	8"	220	4.3	42	40	18
CHS-380MT	15"	381	7.6	98	120	55


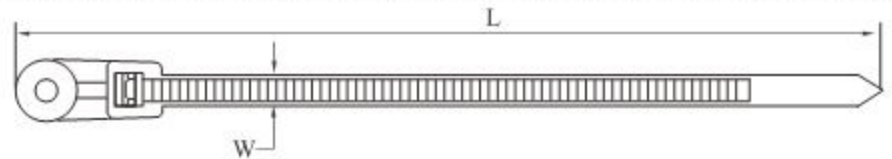


固定锁式尼龙扎带 Saddle Mounting Ties

编 号 ITEM.NO.	L(长)		W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
CHS-165SMT	6 1/2"	165	7.5	33	50	22
CHS-180SMT	7"	180	7.5	38	50	22

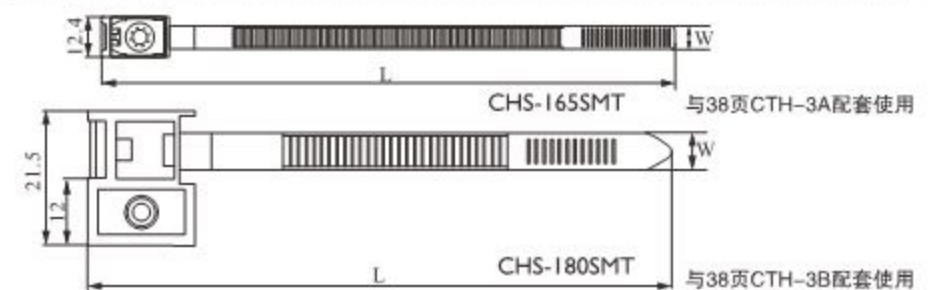

Cable Ties



插销式尼龙扎带


- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 使用方法：先将机版钻孔，然后把扎带插入孔内，再将电线扎紧即可。

Push Mount Ties


- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Usage: insert tie to the hole of table and tighten it.

插销式尼龙扎带(可退型) Push Mount Ties(releasable)

编 号 ITEM.NO.	L(长)		W(宽) mm	(最大) 捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH		孔径(Φ) HOLE DIA.		机板厚度 PANEL THICKNESS	
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM
CHS-150PT	6"	150	8.0	37	40	18	0.252	6.4	0.126	3.2
CHS-175PT	6 5/8"	175	8.0	44	40	18	0.252	6.4	0.126	3.2

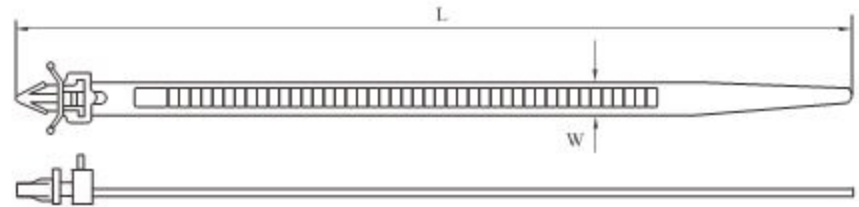


编 号 ITEM.NO.	L(长)		W(宽) mm	(最大) 捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH		孔径(Φ) HOLE DIA.		机板厚度 PANEL THICKNESS	
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM
CHS-165PT	6 1/2"	165	8.0	38	40	18	0.394	10.0	0.126	3.2

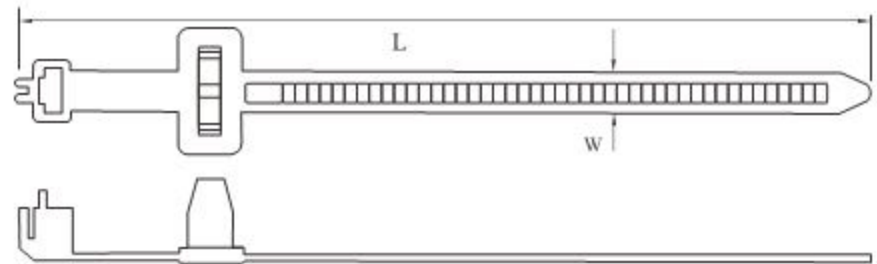

插销式尼龙扎带 Push Mount Ties


编 号 ITEM.NO.	L(长)		W(宽) mm	(最大) 捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH		孔径(Φ) HOLE DIA.		机板厚度 PANEL THICKNESS	
	INCH	MM			LBS	KGS	INCH	MM	INCH	MM
CHS-100PT	4"	100	2.5	22	18	8.0	0.189	4.8	0.094	2.4
CHS-120PT	4 3/4"	120	3.2	25	30	13.6	0.157	4.0	0.079	2.0
CHS-120PPT	4 3/4"	120	4.8	25	50	22.0	0.252	6.4	0.126	3.2
CHS-160PT	6 1/4"	160	4.8	38	50	22.0	0.252	6.4	0.126	3.2
CHS-190PT	7 1/2"	190	4.8	45	50	22.0	0.252	6.4	0.126	3.2

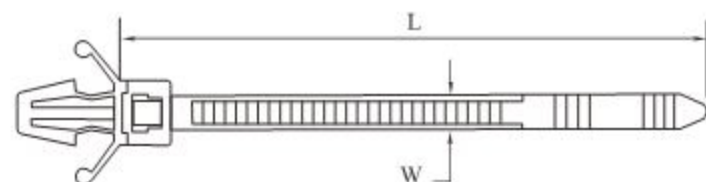

Cable Ties

平扣式扎带 In-line Cable Ties

编号 ITEM.NO.	L(长)		W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力	
	INCH	MM			Min.loop Tensile LBS	Strength KGS
CHS-200 LT	8"	200	4.5	8-45	50	22
CHS-280 LT	11"	280	4.5	8-65	50	22

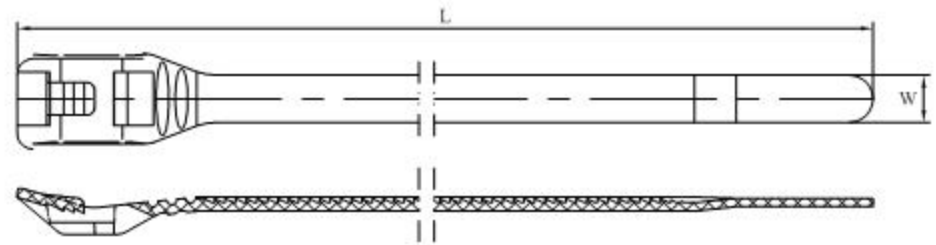


不锈钢嵌片扎带 Stainless Steel Plate Lock Cable Tie

编号 ITEM.NO.	L(长)		W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力	
	INCH	MM			Min.loop Tensile LBS	Strength KGS
NZ-3×100	4"	100	3.0	3-22	22	10
NZ-4×150	6"	150	4.0	3-35	44	20
NZ-4×200	8"	200	4.0	3-50	44	20
NZ-5×250	10"	250	5.0	3-65	55	25
NZ-5×300	12"	300	5.0	3-82	55	25
NZ-8×145	5 3/4"	145	8.0	4-30	130	60
NZ-8×175	7"	175	8.0	4-40	130	60
NZ-8×200	8"	200	8.0	4-50	130	60
NZ-8×240	9 1/2"	240	8.0	4-56	130	60
NZ-8×300	12"	300	8.0	4-80	130	60
NZ-8×400	15 3/4"	400	8.0	4-100	130	60
NZ-10×300	12"	300	10.0	10-80	200	90
NZ-10×350	14"	350	10.0	10-90	200	90
NZ-10×400	15 3/4"	400	10.0	10-105	200	90
NZ-10×450	17 3/4"	450	10.0	10-115	200	90
NZ-10×500	17 11/16"	500	10.0	10-150	200	90

★ NEW 可松式扎带(双孔型) Releasable Cable Ties (double Loop)

编号 ITEM.NO.	L(长) (mm)	W(宽) (mm)	捆扎范围 Bundle Diameter E (mm)	拉力	
				Min.loop Tensile LBS	Strength KGS
CHS-280 RLT	280	4.8	8-60	40	18

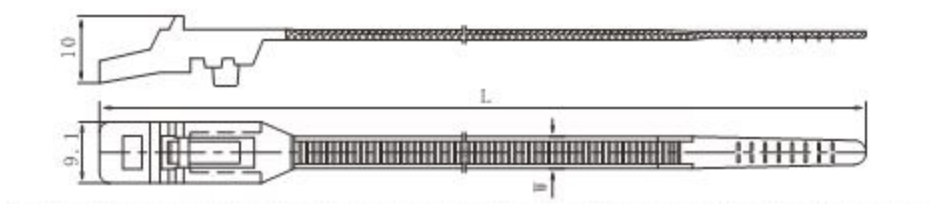

Cable Ties

不锈钢扎带 (船用)

Stainless Steel Cable Ties

For On Board Ships & Offshore Units

SST
SLT
SBT



HST
HLT
HBT



编 号	ITEM.NO.	L(长) mm	W(宽) mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉 力 TENSILE STRENGTH LBS KGS
SST-100	HST-100	100	4.6	22	100 46
SST-152	HST-152	152	4.6	35	100 46
SST-175	HST-175	175	4.6	40	100 46
SST-200	HST-200	200	4.6	50	100 46
SST-250	HST-250	250	4.6	65	100 46
SST-300	HST-300	300	4.6	80	100 46
SST-360	HST-360	360	4.6	95	100 46
SST-400	HST-400	400	4.6	105	100 46
SST-520	HST-520	520	4.6	150	100 46
SST-600	HST-600	600	4.6	180	100 46
SST-680	HST-680	680	4.6	195	100 46
SST-840	HST-840	840	4.6	250	100 46
SST-1050	HST-1050	1050	4.6	285	100 46
SLT-152	HLT-152	152	7.9	35	176 80
SST-175	HST-175	175	7.9	40	176 80
SLT-200	HLT-200	200	7.9	50	176 80
SST-250	HST-250	250	7.9	65	176 80
SLT-300	HLT-300	300	7.9	80	176 80
SLT-360	HLT-360	360	7.9	95	176 80
SST-400	HST-400	400	7.9	105	176 80
SLT-520	HLT-520	520	7.9	150	176 80
SST-600	HST-600	600	7.9	180	176 80
SLT-680	HLT-680	680	7.9	195	176 80
SLT-840	HLT-840	840	7.9	250	176 80
SLT-1050	HLT-1050	1050	7.9	285	176 80
SBT-152	HBT-152	152	12	35	264 120
SST-175	HST-175	175	12	40	264 120
SBT-200	HBT-200	200	12	50	264 120
SST-250	HST-250	250	12	65	264 120
SBT-300	HBT-300	300	12	80	264 120
SBT-360	HBT-360	360	12	95	264 120
SBT-400	HST-400	400	12	105	264 120
SBT-520	HBT-520	520	12	150	264 120
SST-600	HST-600	600	12	180	264 120
SBT-680	HBT-680	680	12	195	264 120
SBT-840	HBT-840	840	12	250	264 120
SBT-1050	HBT-1050	1050	12	285	264 120

- 特殊规格欢迎定做。
- 以上所有规格之不锈钢扎带的带身皆可喷塑。
- 所有喷塑产品的编号另加 “P”, 如 “SST-100P” 或 “HST-100P”。
- Other size are available as requested.
- The body of the above specification stainless steel cable ties can be plastic-coating
- All item No. of plastic-coating products should plus “P”, such as “SST-100P” or “HST-100P”



Cable Ties

不锈钢扎带 (船用)

Stainless Steel Cable Ties


For On Board Ships & Offshore Units

喷塑不锈钢扎带O型

编 号 ITEM.NO.	L(长) mm	W(宽) mm	厚度 THICKNESS mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)
YFO-12X152	152	12.0	0.4	32
YFO-12X200	200	12.0	0.4	47
YFO-12X300	300	12.0	0.4	77
YFO-12X360	360	12.0	0.4	92
YFO-12X520	520	12.0	0.4	145
YFO-12X680	680	12.0	0.4	190
YFO-12X840	840	12.0	0.4	245
YFO-12X1050	1050	12.0	0.4	280
YFO-15X200	200	15.0	0.4	47
YFO-15X300	300	15.0	0.4	77
YFO-15X360	360	15.0	0.4	92
YFO-15X520	520	15.0	0.4	145
YFO-15X680	680	15.0	0.4	190
YFO-15X840	840	15.0	0.4	245
YFO-15X1050	1050	15.0	0.4	280

喷塑不锈钢扎带L型

编 号 ITEM.NO.	L(长) mm	W(宽) mm	厚度 THICKNESS mm	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)
YFL-12X152	152	12.0	0.4	32
YFL-12X200	200	12.0	0.4	47
YFL-12X300	300	12.0	0.4	77
YFL-12X360	360	12.0	0.4	92
YFL-12X520	520	12.0	0.4	145
YFL-12X680	680	12.0	0.4	190
YFL-12X840	840	12.0	0.4	245
YFL-12X1050	1050	12.0	0.4	280
YFL-15X200	200	15.0	0.4	47
YFL-15X300	300	15.0	0.4	77
YFL-15X360	360	15.0	0.4	92
YFL-15X520	520	15.0	0.4	145
YFL-15X680	680	15.0	0.4	190
YFL-15X840	840	15.0	0.4	245
YFL-15X1050	1050	15.0	0.4	280

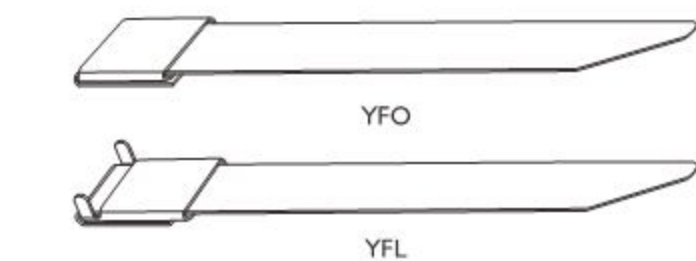

Cable Ties


塑料安全条

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 适用于金融，航运，电力，集装箱等行业的保密用途。
- 标牌上可按客户要求印上名称，商标，日期，流水号等内容。

Plactic Security Seals

- Material: Nylon 66, 94V-2 certified by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Apply to financial services, shipping, electricity, container and other industries.
- Customer name, trademark, date, serial number etc. are allowed to be printed on the marker.

编 号 ITEM.NO.	L(长) (mm)	W(宽) (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	标牌尺寸 STICKER SIZE
PSS-230	230	3.3	42	12X30
PGS-350	350	7.5	70	20X45
SFS-450	450	9	66	55X106

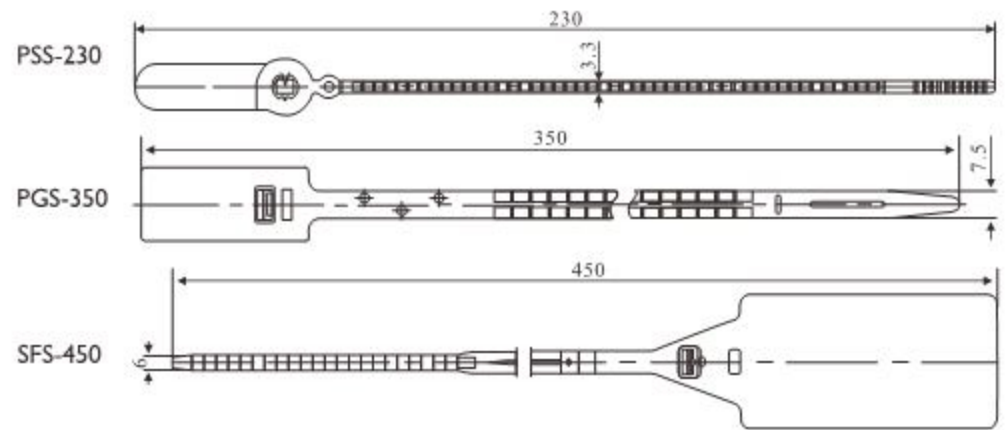

粘扣式扎带

- 材质：母面PP，公面NYLON黑色（备有红、黄、蓝、绿）。
- 用途：适用于网络线(UTP/STP/Fiber)、讯号线、电源线之束缚，避免使用传统尼龙扎线带时，因过紧而影响传输速度，可重复使用。

Magic Cable Ties

- Material: Female sides are made of pp, male sides are made of Nylon.

型 号 ITEM.NO.	L(长) mm	W(宽) mm	最大束线径 Max. Bundle Dia	备 注 REMARK
MGT-125	125	12	30	特殊规格可定做 Other size are available as requested.
MGT-135	135	12	33	
MGT-150	150	12	35	
MGT-180	180	12	40	
MGT-210	210	16	50	
MGT-250	250	16	65	
MGT-310	310	16	85	
MGT-400	400	16	105	
MGT-500	500	16	145	

Cable Ties


基板固定扎带

- 产品说明：两件式设计，带扣与带身装配成组出货。施工省力。
特殊带扣设计，在完全束紧前可将束带松开。
- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。

Infinity Ties

- Description: Two-piece design, Buckle and strap are one assembly. Zero insertion force. First loop is releasable prior to final tensioning
- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.

编 号 ITEM.NO.	L(长) (mm)	W(宽) (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 TENSILE STRENGTH LBS	拉力 TENSILE STRENGTH KGS	备注 REMARK
GTA-250	250	7.5	60	120	55	Single Tooth
GTA-280	280	7.5	65	130	60	Double Tooth

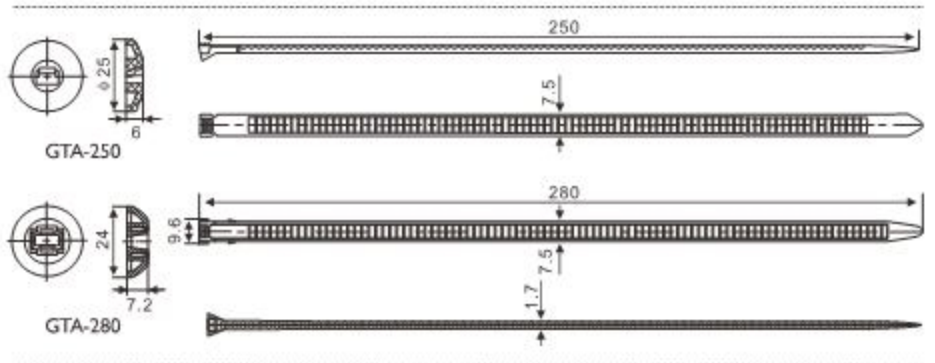

PE带


- 产品说明：应用于园艺，可重复组装使用。
- 材质：PE。
- 颜色：各种颜色皆可订制。

PE Ties

- Description: Application in garden, easy to install. Release and reusable.
- Material: PE.
- Color: All colors are available.

编 号 ITEM.NO.	Length mm	Width mm	Thickness mm
AST-170	170	5.4	1.5

★ NEW




膨胀管式扎带 Expand Plug Cable Ties

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 使用方法：可直接将头部膨胀管嵌入墙体，使用方便。
- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Usage: Can insert the head (Expand plug) into wall, easy to use.

编 号 ITEM.NO.	L(长) INCH	mm	W (mm)	A (mm)	B (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 LBS	Min.Loop Tensile Strength KGS
CHS-150EP	6"	150	7	79	128	35	85	38

★ NEW

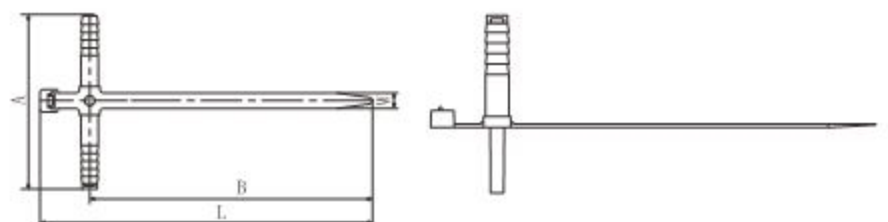


Cable Ties

卡扣式扎带 Buckle Cable Ties

★ NEW

编 号 ITEM.NO.	L (mm)	L1 (mm)	W (mm)	(最大)捆扎范围 MAX.BUNDLE DIA.(mm)	拉力 Min.Loap Tensile Strength LBS	KGS
CHS-158 BCT	193	158	9	35	175	80
CHS-173 BCT	208	173	9	40		
CHS-215 BCT	250	215	9	52		
CHS-251 BCT	286	251	9	63		
CHS-341 BCT	376	341	9	85		

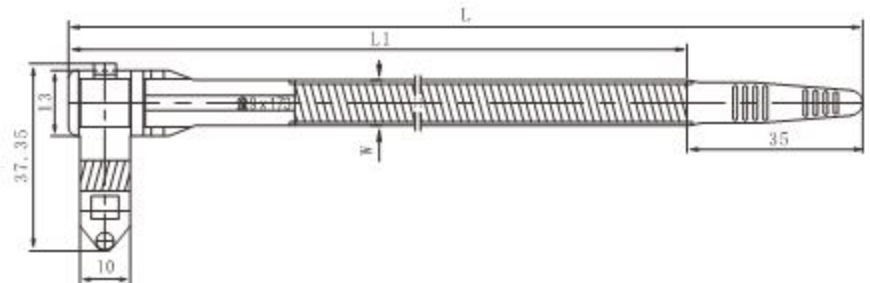

PVC扎丝

- 材质：采用UL认可之尼龙66料制成，防火等级94V-2，耐酸、耐蚀、绝缘性良好，不易老化、承受力强。
- 用途：适用于各种电线，园林，园艺等捆孔。

Twist Ties

- Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, Acid & erosion control, insulate well and not apt to age.
- Application: used in wires, park and gardening.

编 号 ITEM.NO.	内 径 d(mm)	包 装 PACKING	备 注 REMARK
TTS-0.45	0.45	1 Kg / Roll	特殊规格可定做 Other size are available as requested.
TTS-0.55	0.55		
TTS-0.75	0.75		
TTS-0.90	0.9		
TTS-1.20	1.2		
TTS-1.50	1.5		

本公司热忱欢迎新老客户来样,来图或来模委托加工各种扎带和塑料件。

We welcome OEM orders for cable ties or plastic parts by samples,drawing or molds.

- 来样、来图或来模不得涉及任何专利问题
- The OEM orders for wire connectors by samples, drawing or molds shouldn't involve in the infringement of patent.
- 左图仅供参考
- All pictures here are for reference only.

